

**POLYFLOR™**  
COVERING THE WORLD

1160 SMOKESTONE

**Classic Mystique PUR**

POLYFLOR  
**PUR**  
POLISH FREE



## Classic Mystique PUR

Classic Mystique PUR retains the uncomplicated, clean architectural feel of subtle neutrals, but now with added warmer tones for a perfectly balanced combination.

Available in 16 harmonious colours, Classic Mystique PUR has a tonal non-directional appearance, featuring a duotone chip decoration with marbled tonal highlight chips.

As with all Homogeneous PUR ranges, Classic Mystique PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low-cost polishfree maintenance regime for the lifetime of the flooring.

Polyflor Homogeneous PUR ranges demonstrate outstanding durability and abrasion resistance. Classic Mystique PUR achieves the abrasion wear rating EN ISO 10581 Type I, demonstrating excellent resilience and long life.

Following an individual assessment from BRE Global, Classic Mystique PUR achieves an A+ rating in major sectors such as health, education and retail (ENP 472).

Classic Mystique PUR is 100% recyclable and contains 25% recycled material.

Ideally suited for heavy traffic areas, Classic Mystique PUR is recommended for use throughout commercial interiors, healthcare and education facilities, as well as retail outlets.

## Classic Mystique PUR

Duotone chip decoration with  
marbled tonal highlight chips

### KEY FEATURES

- Attractive, high performance, heavy duty homogeneous floorcovering.
- BRE Global environment A+ rating (Certificate No ENP 472).
- Achieves abrasion wear rating EN ISO 10581 Type I.
- Polyurethane reinforcement to facilitate a low-cost, lifetime polish-free maintenance regime.
- Sophisticated non-directional decoration with duotone base chips and marbled tonal highlight chips available in both sheet and tile.
- Use Area Classification 23/34/43 as defined in EN 685.



1380 NOCTURNE



## Classic Mystique PUR

2 x 20m = 40m<sup>2</sup>



**1200 PALE SLATE**  
NCS S 3502-B

W/R 1200  
LRV 47



**1400 QUARTZ**  
NCS S 2500-N


W/R 9340  
LRV 50



1400 QUARTZ

# Classic Mystique PUR

 2 x 20m = 40m<sup>2</sup>


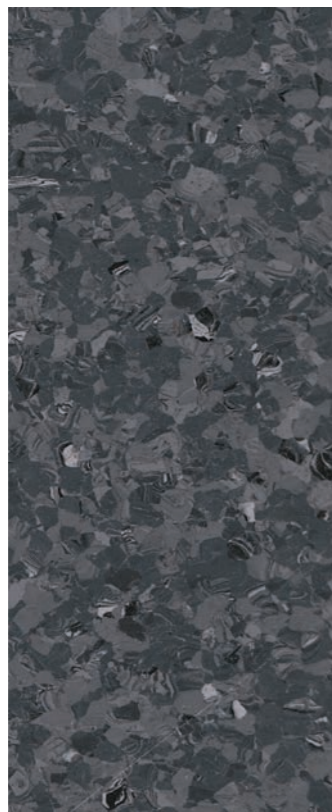



**1160 SMOKESTONE**  
NCS S 4502-G

W/R 9120  
LRV 28

**1380 NOCTURNE**  
NCS S 6502-B

W/R 8270  
LRV 13




 1380 NOCTURNE



□ 1260 SUNBLAZE

## Classic Mystique PUR

📐 2 x 20m = 40m<sup>2</sup>

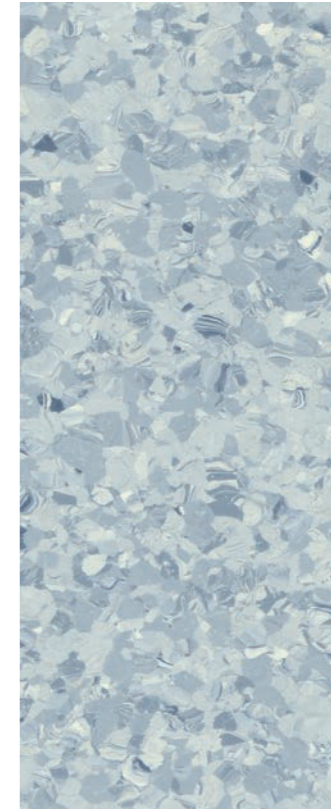


**1410 LADOGA**  
NCS S 2010-R90B

W/R 1410  
LRV 46




**1260 SUNBLAZE**  
NCS S 3060-Y90R

W/R 1260  
LRV 14




# Classic Mystique PUR

 2 x 20m = 40m<sup>2</sup>

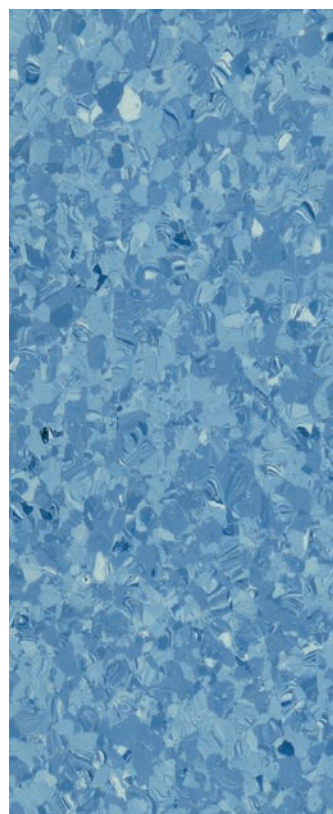



**1210 CLOUDBURST**  
NCS S 2040-R90B


W/R 1210  
LRV 32

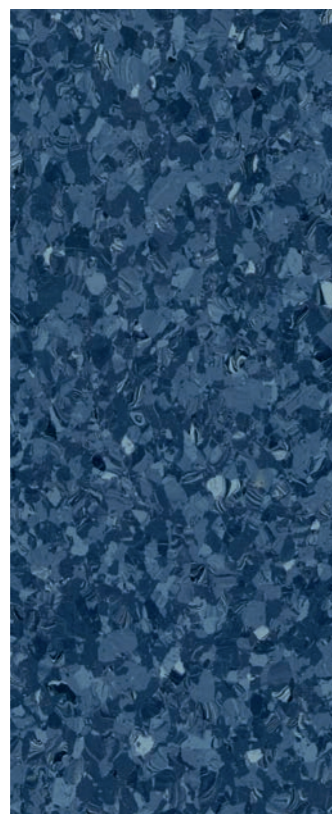

**1220 DELTA BLUE**  
NCS S 6020-R80B

W/R 1220  
LRV 11



 **1220 DELTA BLUE**



□ 1330 MOUNTAIN LAKE

## Classic Mystique PUR



2 x 20m = 40m<sup>2</sup>




**1330 MOUNTAIN LAKE** W/R 8350  
NCS S 3020-R908 LRV 28




**1550 STEEL PARADE** W/R 1550  
NCS S 3500-N LRV 36

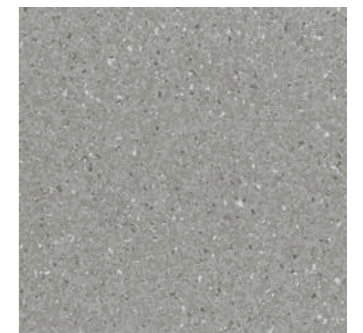

# Classic Mystique PUR

 2 x 20m = 40m<sup>2</sup>

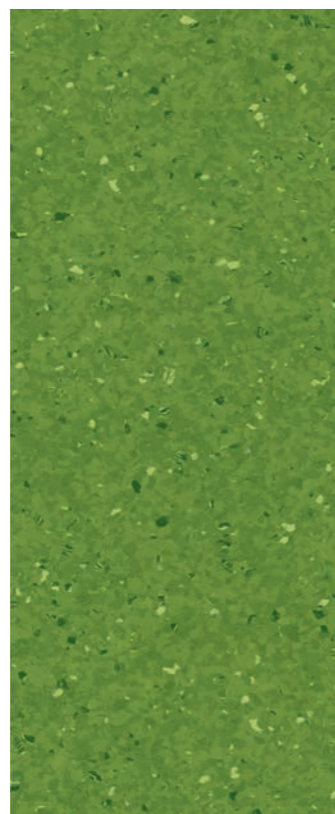

**1140 LEMON ZEST** W/R 1140  
NCS S 1060-Y10R LRV 58

**1150 SPRING MEADOW** W/R 1150  
NCS S 3050-G40Y LRV 22



 **1150 SPRING MEADOW**





□ 1430 SILVER MIST

## Classic Mystique PUR

📏 2 x 20m = 40m<sup>2</sup>



**1430 SILVER MIST**  
NCS S 1505-Y40R

W/R 1430  
LRV 62




**1370 SATINWOOD**  
NCS S 1505-Y30R

W/R 8320  
LRV 55



# Classic Mystique PUR

 2 x 20m = 40m<sup>2</sup>

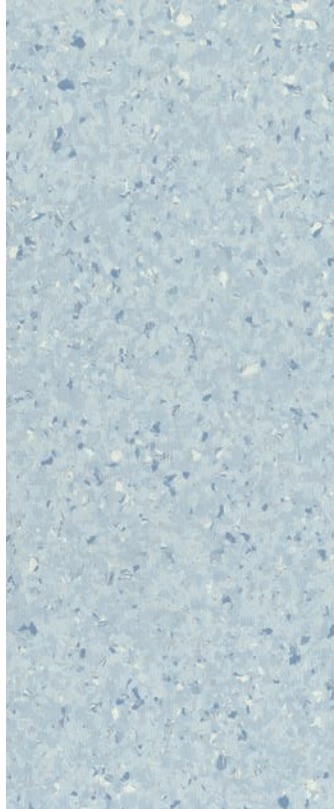


**1590 ATLANTIC SURF**  
NCS S 1510-R80B

W/R 1590  
LRV 58

**1560 SOFT ALMOND**  
NCS S 1505-Y40R


W/R 1560  
LRV 64



 1590 ATLANTIC SURF



## Classic Mystique PUR

 2 x 20m = 40m<sup>2</sup>



**1460 SHORELINE** W/R 8320  
NCS S 1505-Y30R LRV 55




**1540 SILENT DOVE** W/R 1540  
NCS S 1002-Y LRV 66



**1570 NUT HUSK** W/R 1570  
NCS S 3005-Y50R LRV 38



**1320 ASPARAGUS** W/R 8360  
NCS S 3010-G50Y LRV 37

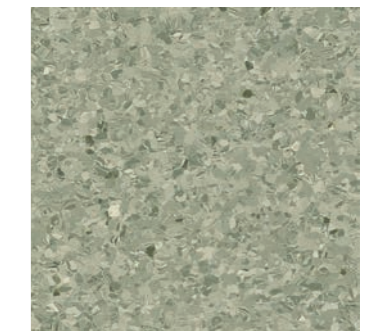


# Classic Mystique PUR


📐 2 x 20m = 40m<sup>2</sup>




**1580 SORREL BAY** W/R 1580 LRV 36  
NCS S 3010-Y30R

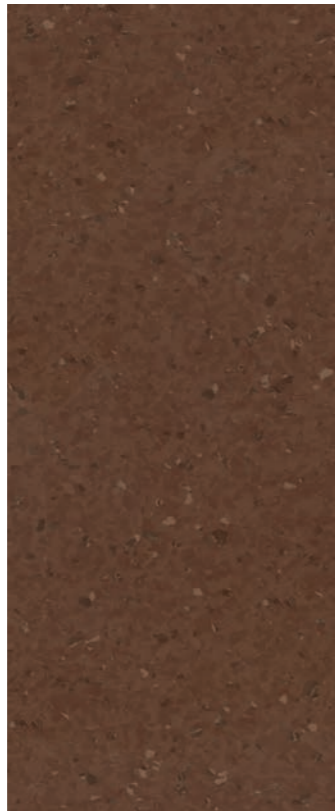


**1520 RICH CHOCOLATE** W/R 1520 LRV 10  
NCS S 7010-Y50R

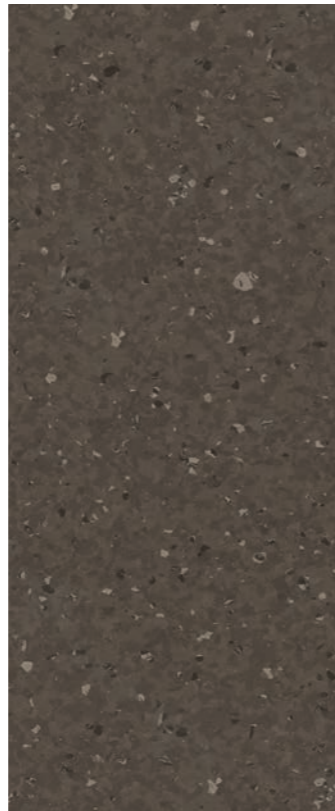

**1190 SMOKED TRUFFLE** W/R 1190 LRV 612  
NCS S 7005-Y20R

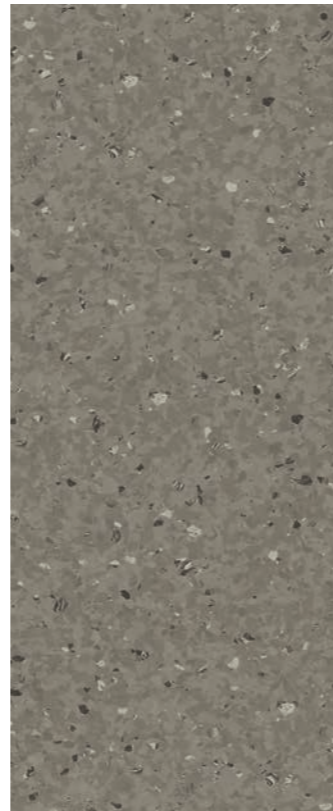

**1530 CLOUD STONE** W/R 1530 LRV 25  
NCS S 4502-Y



□ 1520 RICH CHOCOLATE



# Classic Mystique PUR

## TECHNICAL SPECIFICATIONS

Classic Mystique PUR

PRODUCT FORMAT	Standard	Result
Gauge	ISO 24346 (EN 428)	2.0mm
Total Weight	ISO 23997 (EN 430)	3250g/m <sup>2</sup>
Finish		PUR

SHEET SIZE	Size	Shades	Quantity per Box	Coverage per Box/Roll
Sheet	2m x 20m	24		40m <sup>2</sup>

PERFORMANCE REQUIREMENTS	Standard	Result
General Performance	ISO 10581 ASTM F1913 ASTM F1700	Conforms Conforms Class I, Type A
Use Area	ISO 10874 (EN 685)	23, 34, 43
Slip Resistance	EN 13893 DIN 51130 / DIN EN 16165 Ann. B AS 4586 Appendix D ASTM D2047	Class DS R9 R10 SCOF ≥0.6
Binder Content	ISO 10581	Type I
Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 AS ISO 9239.1 CAN/ULC S102.2	Class Bfl-S1 <450 Class 1 ≥ 8kW/m <sup>2</sup> FSV < 300; SDV < 500
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ISO 24343-1 (EN 433) ASTM F970 (Modified)	≤0.10mm ≤0.005" @ 750psi
Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
Flexibility	ASTM F137	Pass
Underfloor Heating		Suitable, max 27°C
Light Fastness	ISO 105-B02 (Method 3)	≥6
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets

SUSTAINABILITY	Standard	Result
BRE Green Guide		A+ ENP 472
GreenTag		GreenRate Level A, LCA Rate Gold Plus
Generic EN 15804 EPD		Available
Recyclable		100%
Recycled Content		25%
REACH		Compliant
Indoor Air Comfort Gold		Eurofins certified product
FloorScore		Certified
Finnish M1 Classification		Certified
AgBB/ABG		Pass
VOC Emissions	TVOC after 28 days	≤ 10µg/m <sup>3</sup>
Responsible Sourcing	BES 6001	Excellent

ACOUSTIC PERFORMANCE	Standard	Result
Impact Sound Reduction	ISO 10140-3	4dB

MAINTENANCE PERFORMANCE	Standard	Result
Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good resistance Good resistance
Alco Hand Gels		Compatible for use with most commonly used alco-based hand gels.
Steam Cleaning		Suitable for steam cleaning on a periodic basis.

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection. Regular light maintenance is more cost-effective than periodic heavy maintenance and more beneficial to the floor covering.

HYGIENE	Standard	Result
Bacterial Resistance	ISO 846 Part C	Does not favour growth
Ease of Radioactive Decontamination	ISO 8690	Excellent



# Classic Mystique PUR

## RANGE SHADES - 25 SHADES


Sheet Size : 2 x 20m



**1140 LEMON ZEST** W/R 1140  
NCS S 1060-Y10R LRV 58



**1150 SPRING MEADOW** W/R 1150  
NCS S 3050-G40Y LRV 22




**1160 SMOKESTONE** W/R 9120  
NCS S 4502-G LRV 28




**1190 SMOKED TRUFFLE** W/R 1190  
NCS S 7005-Y20R LRV 612




**1200 PALE SLATE** W/R 1200  
NCS S 3502-B LRV 47




**1210 CLOUDBURST** W/R 1210  
NCS S 2040-R90B LRV 32




**1220 DELTA BLUE** W/R 1220  
NCS S 6020-R80B LRV 11



**1260 SUNBLAZE** W/R 1260  
NCS S 3060-Y90R LRV 14




**1320 ASPARAGUS** W/R 8360  
NCS S 3010-G50Y LRV 37



**1330 MOUNTAIN LAKE** W/R 8350  
NCS S 3020-R90B LRV 28



**1370 SATINWOOD** W/R 8320  
NCS S 1505-Y30R LRV 55




**1380 NOCTURNE** W/R 8270  
NCS S 6502-B LRV 13

# Classic Mystique PUR


Sheet Size : 2 x 20m



**1400 QUARTZ** W/R 9340  
NCS S 2500-N LRV 50



**1410 LADOGA** W/R 1410  
NCS S 2010-R90B LRV 46




**1430 SILVER MIST** W/R 1430  
NCS S 1505-Y40R LRV 62



**1460 SHORELINE** W/R 8320  
NCS S 1505-Y30R LRV 55




**1520 RICH CHOCOLATE** W/R 1520  
NCS S 7010-Y50R LRV 10



**1530 CLOUD STONE** W/R 1530  
NCS S 4502-Y LRV 25



**1540 SILENT DOVE** W/R 1540  
NCS S 1002-Y LRV 66



**1550 STEEL PARADE** W/R 1550  
NCS S 3500-N LRV 36



**1560 SOFT ALMOND** W/R 1560  
NCS S 1505-Y40R LRV 64



**1570 NUT HUSK** W/R 1570  
NCS S 3005-Y50R LRV 38



**1580 SORREL BAY** W/R 1580  
NCS S 3010-Y30R LRV 36



**1590 ATLANTIC SURF** W/R 1590  
NCS S 1510-R80B LRV 58

**POLYFLOR INDONESIA**

Jl. Jendral Sudirman Kav. 29-31 WTC5, RT.8/RW.3  
Kuningan, Karet, Jakarta, South Jakarta City, Jakarta 12920, Indonesia  
T: +62 818-0565-0101 / +62 817-897-169  
www.polyflor.co.id

**POLYFLOR MALAYSIA**

Lot 2D, Jalan Kilang 51/215, Section 51,  
46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia.  
T: 1300 80 7788  
E: sales@polyflor.com.my  
www.polyflor.com.my

**POLYFLOR PHILIPPINES**

E: sales@polyflor.com.my  
www.polyflor.com.my

**POLYFLOR SINGAPORE**

T: +65-87908408  
E: sales@polyflor.com.my

**POLYFLOR THAILAND**

Bhiraj Tower at EmQuartier Building  
30th Floor, Room No. 3087, Watthana, Bangkok 10110, Thailand  
T: +603 - 7770 0990  
www.polyflorthailand.com

**POLYFLOR VIETNAM**

6F & 7F, Me Linh Point Tower 2, Ngo Due Ke,  
District 1, Ho Chi Minh City, Vietnam  
T: +84 39 9240177 / +84 96 721 8151  
E: info@polyflor.com.vn / sales@polyflor.com.my  
www.polyflor.co.vn

